

ENROUTE CHART - ICAO UPPER AIRSPACE

AIP Belarus

LEGEND


- RNAV permanent routes
- - - CDR1
- Domestic ATC routes
- ▲ REP Compulsory
- △ REP On request
- VOR/DME
- International AD
- 26.7 26.7 Bi (Uni)-directional RNAV route (AWY), Distance (NM)
- L23 Route designator
- M996* Combined CDR/permanent route
- FIR
- Communication sector boundary
- TMA
- CTR
- Prohibited area
- Danger area
- +6° Isogonic line

PROHIBITED AREAS

- 9 UMP183 FL200 GND H24

DANGERES AREAS

- 16 UMD187 FL240 by NOTAM GND
- 19 UMD190 FL240 by NOTAM GND
- 20 UMD192 FL240 by NOTAM GND
- 21 UMD193 FL240 by NOTAM GND
- 22 UMD194 FL240 by NOTAM GND
- 25 UMD197 FL240 by NOTAM GND
- 30 UMD202 82020 FT AMSL GND by NOTAM

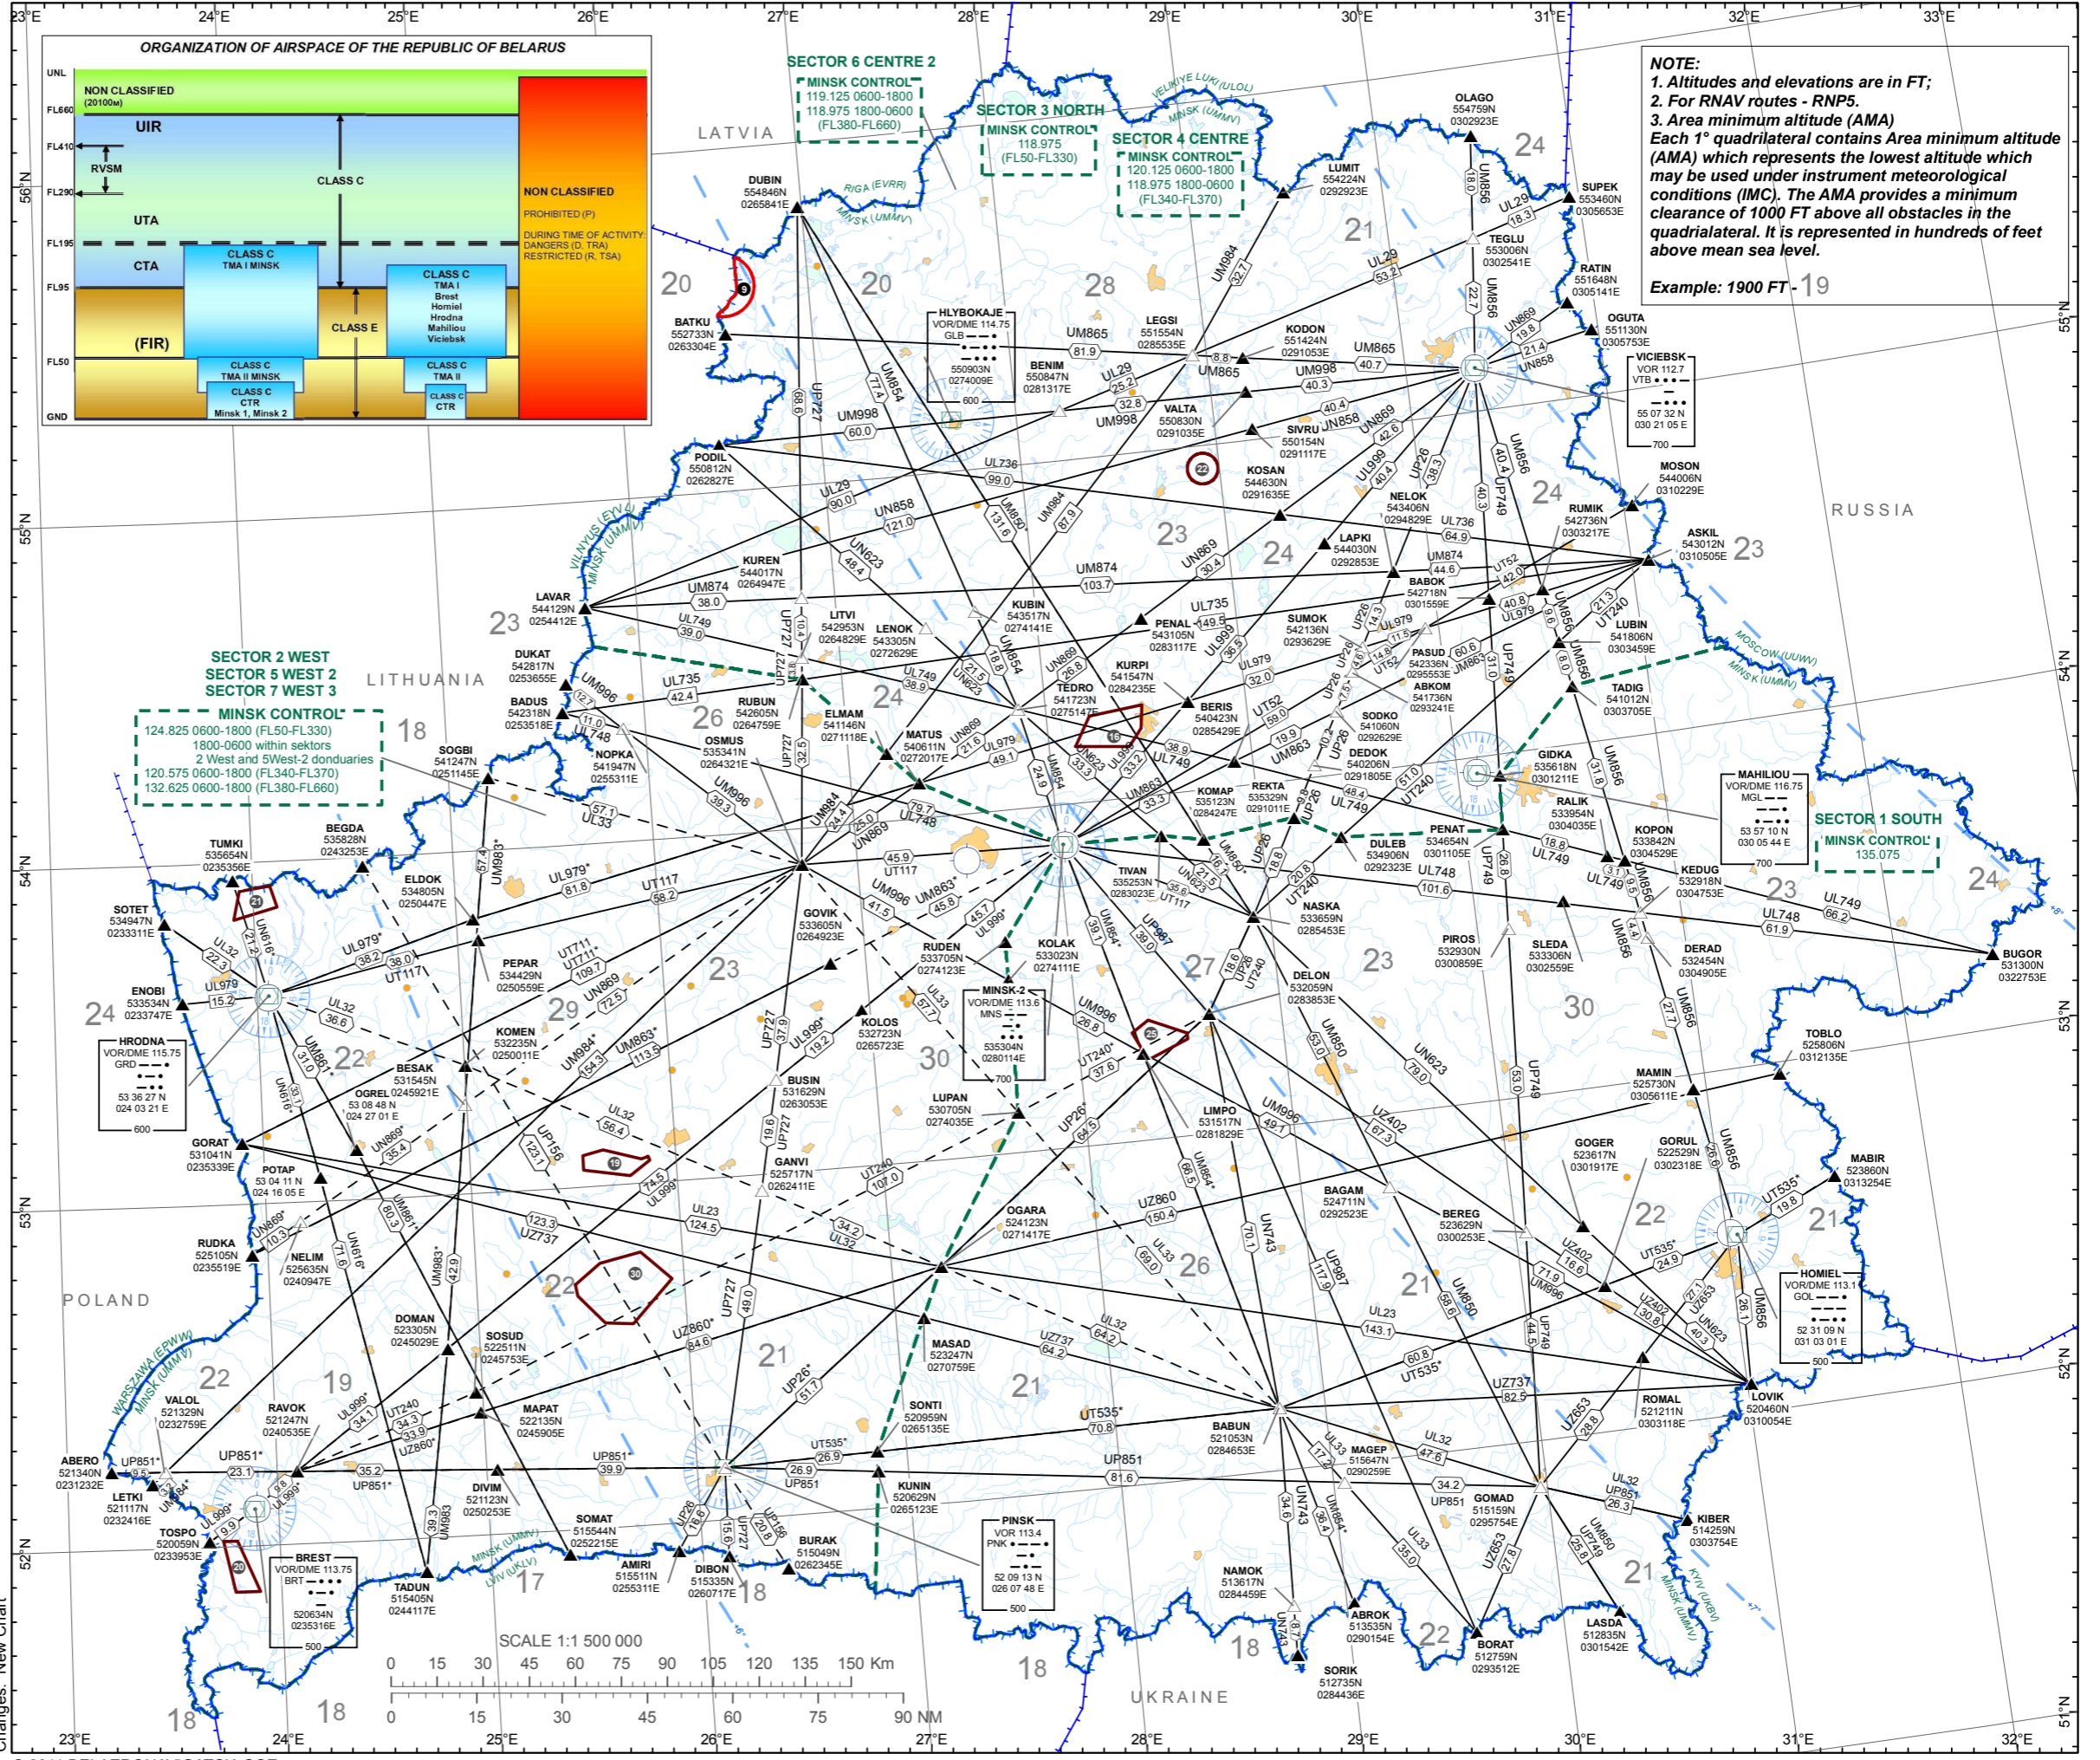

NOTE:

- Altitudes and elevations are in FT;
- For RNAV routes - RNP5.
- Area minimum altitude (AMA)

Each 1° quadrilateral contains Area minimum altitude (AMA) which represents the lowest altitude which may be used under instrument meteorological conditions (IMC). The AMA provides a minimum clearance of 1000 FT above all obstacles in the quadrilateral. It is represented in hundreds of feet above mean sea level.

Example: 1900 FT - 19

Changes: New Chart